


DRAPERY SYSTEM

Ripplefold

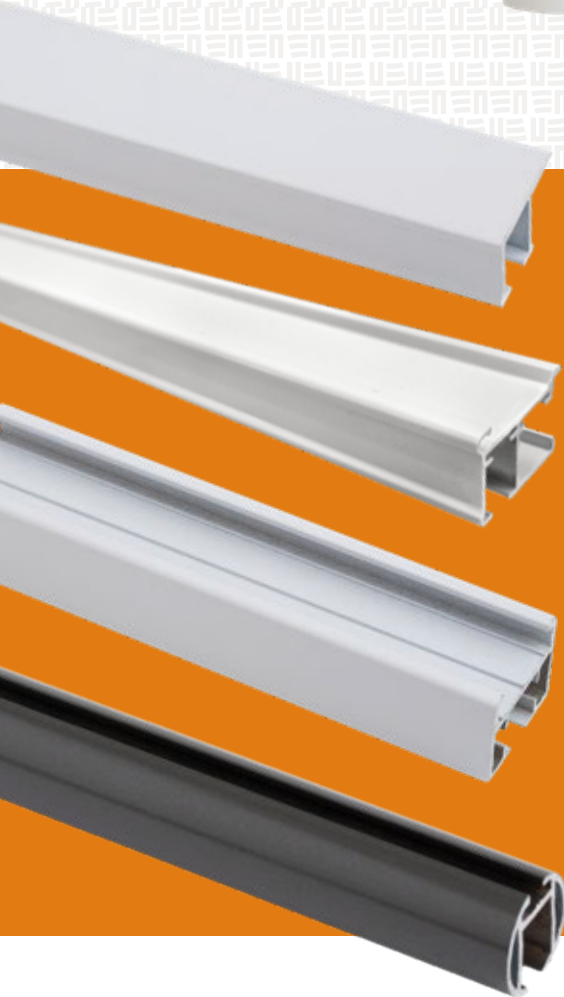

GENERAL SPECS

- Allows four sizes of crimping (fullness).
- Different options of distance between the clasp and clasp.
- Perfect wave form.
- Option of rimmed and friction carriers.
- Available for exposed and concealed baton.
- Ripplefold compatible rails:
 - RM Wall rail (wall or ceiling installation).
 - RT Ceiling Rail.
 - RC Chorded rail.
 - MD360 Motorized system
 - RHD H rail
- Can be curved
 - RM
 - RHD
 - MD360

REQUIREMENTS FOR CARRIERS AND BANDS IN A CORRUGATED SYSTEM

FULLNESS	PRODUCT	SEPARATION BETWEEN CARRIERS	CARRIERS PER ML	BAND QUANTITY PER ML CR-425
60%	CRL-2-600	6.55 cm	17 pzs	160 cm
80%	CRL-2-800	6.04 cm	19 pzs	180 cm
100%	CRL-2-1000	5.35 cm	20 pzs	200 cm
120%	CRL-2-1200	4.52 cm	22 pzs	220 cm

m LINEAR METER

OTHER COMPATIBLE BANDS


PRODUCT	SEPARATION BETWEEN SNAPS
CA-750-1905	19.05 cm
CA-850-2159	21.59 cm
CA-1000-2540	25.40 cm

We manufacture quality, We offer confidence


bajacontract.com

COMPATIBLE PRODUCTS

BRACKETS
STD-6

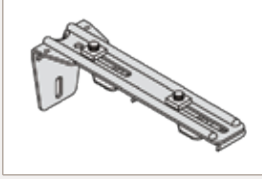

STT-825



STS-3






ST-3




END CAPS
TFR-4001




CONNECTORS
RM-UNION

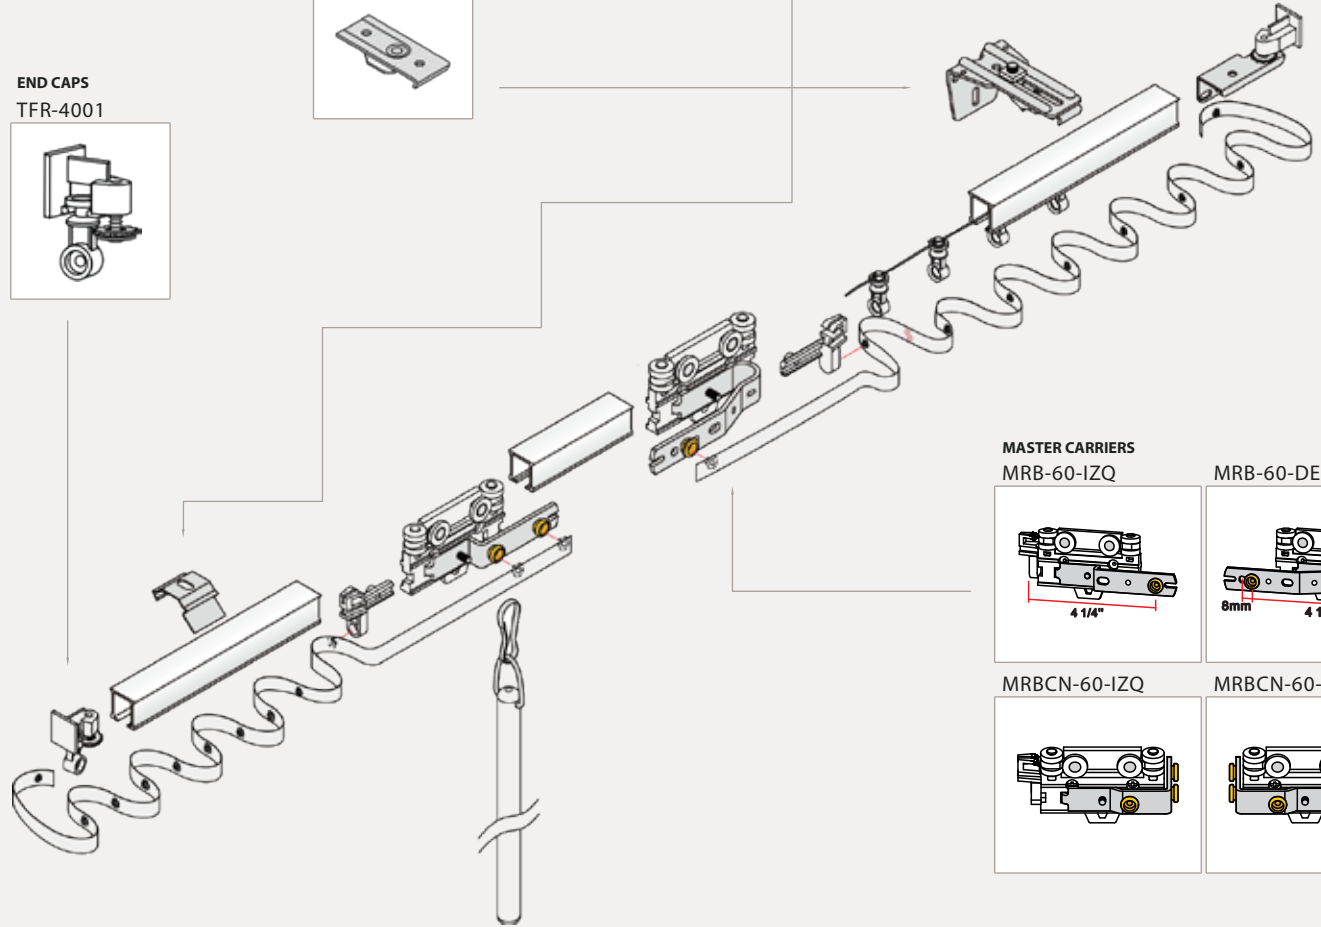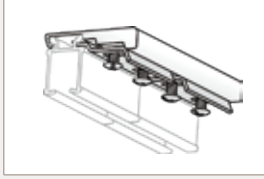


MASTER CARRIERS
MRB-60-IZQ




MRB-60-DER



MRBCN-60-IZQ




MRBCN-60-DER




CARRIERS


CFR-3000




CF-2000



CFR-600



CDFR-600



CRLN-2-600

